



# Alfa Laval T20 W

## Gasketed plate-and-frame heat exchanger for demanding applications

Alfa Laval Industrial semi-welded line is used when gaskets are not suitable for one of the process media. The semi-welded line can also withstand a higher design pressure compared to fully gasketed plate-and-frame heat exchangers.

Suitable for a wide range applications, this model is available with a large selection of plate and gasket types.

### Applications

- Chemicals
- Energy and Utilities
- Food and Beverages
- HVAC and Refrigeration
- Marine and Transportation
- Mining, Minerals and Pigments
- Pulp and Paper
- Steel
- Water and Waste treatment

### Benefits

- High energy efficiency – low operating cost
- Flexible configuration – heat transfer area can be modified
- Easy to install – compact design
- High serviceability – easy to open for inspection and cleaning and easy to clean by CIP
- Access to Alfa Laval's global service network

### Features

Every detail is carefully designed to ensure optimal performance, maximum uptime and easy maintenance. Selection of available features:

- 5-point alignment system
- Reinforced hanger
- Chocolate pattern distribution area
- Glued gasket
- Clip-on gasket
- Leak chamber
- RefTight™ sealing system
- Bearing box
- Fixed bolt head
- Key hole bolt opening
- Lifting lug
- Lining
- Lock washer
- Pressure plate roller
- Tightening bolt cover
- Optimized Alfa Laval drain connection



### Extending performance

#### with Alfa Laval 360° Service Portfolio

Our extensive services ensure top performance from your Alfa Laval equipment throughout its life cycle. The availability of parts and our team's commitment and expertise bring you peace of mind.

#### Start-up

- Installation
- Installation Supervision
- Commissioning

#### Maintenance

- Cleaning Services
- Reconditioning
- Repair
- Service Tools
- Spare Parts

#### Support

- Exclusive Stock
- Technical Documentation
- Telephone Support
- Training
- Troubleshooting

#### Improvements


- Equipment Upgrades
- Redesign
- Replacement and Retrofit

#### Monitoring

- Condition Audit
- Performance Audit

## Dimensional drawing

Measurements mm (inches)

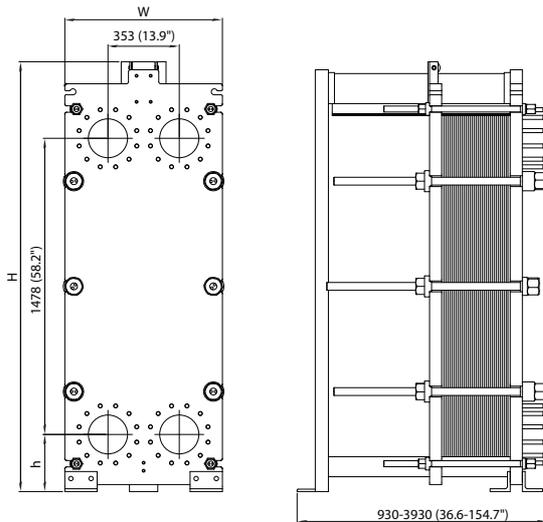

Type	H	W	h
T20-FG	2145 (84.4")	780 (30.7")	285 (11.2")
T20-FS	2183 (85.9")	780 (30.7")	323 (12.7")

## Technical data

### Plates

Name	Type	Free channel, mm (inches)
T20-BW	Semi-welded	2.5 (0.098)
T20-MW	Semi-welded	4.0 (0.16)

### Materials

Heat transfer plates	304/304L, 316/316L, 904L, 254 C-22, C-276, C-2000, D-205 Alloy 33, Ni, Ti, TiPd
Field gaskets	NBR, EPDM, FKM
Ring gaskets	NBR, EPDM, FKM, FEPM, PTFE, CR
Flange connections	Carbon steel Metal lined: stainless steel, titanium
Frame and pressure plate	Carbon steel, epoxy painted

Other materials may be available on request.

All option combinations may not be configurable.

## Operational data

Frame, PV-code	Max. design pressure (barg/psig)	Max. design temperature (°C/°F)
FG, ASME	10.3/150	177/350
FG, PED	16.0/232	180/356
FS, ASME	27.6/400	160/320
FS, PED	30.0/435	160/320

Extended pressure and temperature rating may be available on request.

### Flange connections

FG, ASME	ASME B16.5 Class100 NPS 8 ASME B16.5 Class150 NPS 8
FG, PED	EN 1092-1 DN200 PN10 EN 1092-1 DN200 PN16
FS, ASME	ASME B16.5 Class 300 NPS 8 ASME B16.5 Class 400 NPS 8
FS, PED	EN 1092-1 DN200 PN25 EN 1092-1 DN200 PN40

Standard EN1092-1 corresponds to GOST 12815-80 and GB/T 9115.

### How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.